



LNGU 16

	W1	D1	L	S
	(mm)	(mm)	(mm)	(mm)
1607	13.200	5.70	16.60	7.50

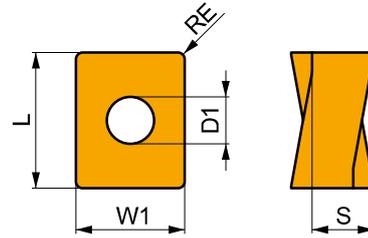

Valores de inicio adecuados para la velocidad de corte (vc), avance (f) y profundidad de corte (ap). Consulte nuestra APP Calculadora de mecanizado para obtener más cálculos.

Producto	RE (mm)	P			M			K			N			S			H		
		vc (m/min)	f (mm/tooth)	ap (mm)															








Geometría M muy positiva para mecanizado medio.

LNGU 160708SR-M	8215	0.8	■	200	0.18	5.0	■	—	—	—	■	190	0.18	5.0	■	—	—	—	■	40	0.15	1.0
	M8340	0.8	■	180	0.18	5.0	■	—	—	—	■	170	0.18	5.0	■	—	—	—	■	—	—	—
	M9315	0.8	■	265	0.18	5.0	■	—	—	—	■	250	0.18	5.0	■	—	—	—	■	50	0.15	1.0
	M9325	0.8	■	250	0.18	5.0	■	—	—	—	■	235	0.18	5.0	■	—	—	—	■	50	0.15	1.0



a_s / DC	5%	10%	15%	20%	25%	30%	40%	50%	60%	70%	75%	80%	90%	100%
	1.48	1.35	1.27	1.22	1.19	1.16	1.11	1.08	1.05	1.03	1.00	1.00	1.00	1.00
	2.20	1.60	1.35	1.20	1.10	0.95	0.85	0.75	0.85	0.95	1.00	1.00	1.00	1.00
	0.64	0.64	0.64	0.64	0.64	0.65	0.65	0.67	0.68	0.71	0.72	0.74	0.79	1.00

	LNMU 16-F	LNMU 16-M					LNMU 16-R		LNGU 16-M	LNGU 16-FA
	0.8	0.8	2.0	3.0	4.0	0.8	1.6	0.8	0.8	
	3.30	3.30	2.11	1.12	0.10	3.30	2.50	3.24	3.30	

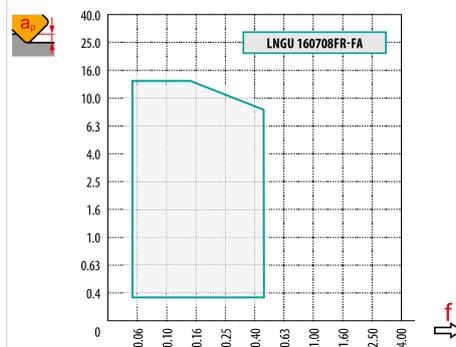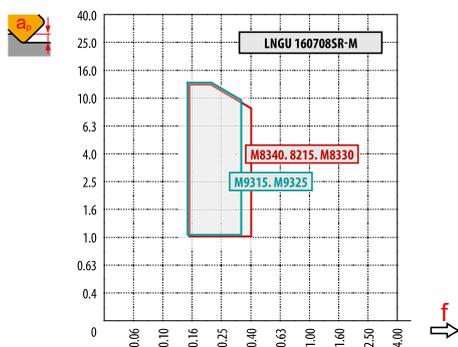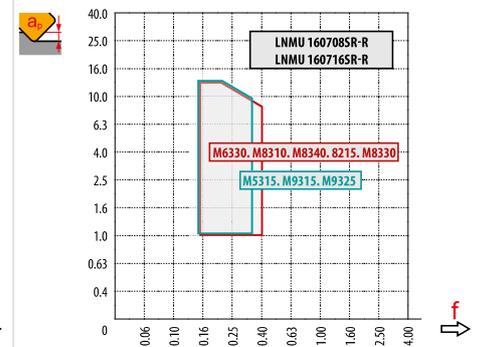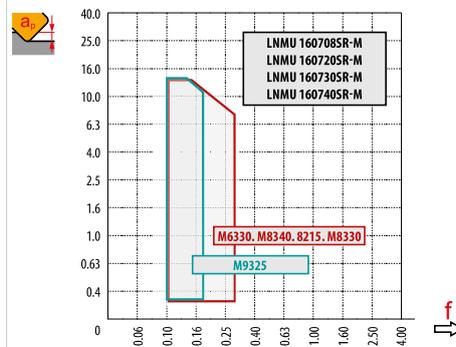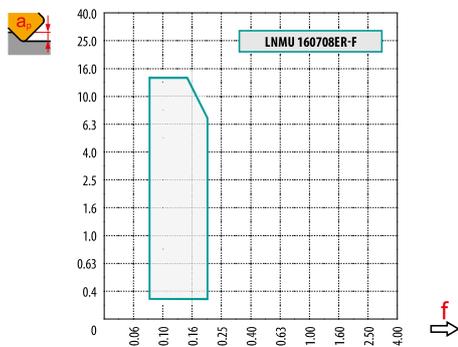

max.
7.0



	1.0	6.0	13.0
	0.31	0.24	0.13