


PPH

	CDI	D1	INSL	S
	(mm)	(mm)	(mm)	(mm)
0800	8.0	2.50	7.0	2.40
1000	10.0	3.00	8.5	2.60
1200	12.0	3.50	10.0	3.00
1600	16.0	4.00	12.0	4.00
2000	20.0	5.00	15.0	5.00
2500	25.0	6.00	18.5	6.00
3000	30.0	8.00	22.5	7.00
3200	32.0	8.00	23.5	7.00

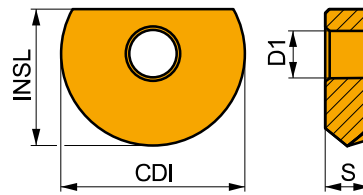

Valores de inicio adecuados para la velocidad de corte (vc), avance (f) y profundidad de corte (ap). Consulte nuestra APP Calculadora de mecanizado para obtener más cálculos.

Producto	RE	P			M			K			N			S			H		
		vc	f	ap	vc	f	ap	vc	f	ap	vc	f	ap	vc	f	ap	vc	f	ap
	(mm)	(m/min)	(mm/tooth)	(mm)	(m/min)	(mm/tooth)	(mm)	(m/min)	(mm/tooth)	(mm)	(m/min)	(mm/tooth)	(mm)	(m/min)	(mm/tooth)	(mm)	(m/min)	(mm/tooth)	(mm)




Geometría CL1 con diseño de filo agudo.

PPH 0800-CL1	2003	—	285	0.36	0.4	145	0.32	0.4	270	0.36	0.4	—	—	—	—	—	—	55	0.15	1.0
PPH 1000-CL1	2003	—	280	0.36	0.5	140	0.32	0.5	265	0.36	0.5	—	—	—	—	—	—	55	0.15	1.0
PPH 1200-CL1	2003	—	275	0.36	0.6	140	0.32	0.6	260	0.36	0.6	—	—	—	—	—	—	55	0.15	1.0
PPH 1600-CL1	2003	—	265	0.36	0.8	135	0.32	0.8	250	0.36	0.8	—	—	—	—	—	—	50	0.15	1.0
PPH 2000-CL1	2003	—	260	0.36	1.0	130	0.32	1.0	245	0.36	1.0	—	—	—	—	—	—	50	0.15	1.0
PPH 2500-CL1	2003	—	250	0.36	1.3	125	0.32	1.3	235	0.36	1.3	—	—	—	—	—	—	50	0.15	1.0
PPH 3000-CL1	2003	—	245	0.36	1.5	120	0.32	1.5	230	0.36	1.5	—	—	—	—	—	—	45	0.15	1.0
PPH 3200-CL1	2003	—	245	0.36	1.6	120	0.32	1.6	230	0.36	1.6	—	—	—	—	—	—	45	0.15	1.0



Geometría CL4 con diseño de filo agudo para corte interrumpido.

PPH 0800-CL4	8215	—	270	0.36	0.4	—	—	—	255	0.36	0.4	—	—	—	—	—	—	50	0.15	1.0
PPH 1000-CL4	8215	—	265	0.36	0.5	—	—	—	250	0.36	0.5	—	—	—	—	—	—	50	0.15	1.0
PPH 1200-CL4	8215	—	255	0.36	0.6	—	—	—	240	0.36	0.6	—	—	—	—	—	—	50	0.15	1.0
PPH 1600-CL4	8215	—	250	0.36	0.8	—	—	—	235	0.36	0.8	—	—	—	—	—	—	50	0.15	1.0
PPH 2000-CL4	8215	—	245	0.36	1.0	—	—	—	230	0.36	1.0	—	—	—	—	—	—	45	0.15	1.0
PPH 2500-CL4	8215	—	240	0.36	1.3	—	—	—	225	0.36	1.3	—	—	—	—	—	—	45	0.15	1.0
PPH 3000-CL4	8215	—	235	0.36	1.5	—	—	—	220	0.36	1.5	—	—	—	—	—	—	45	0.15	1.0
PPH 3200-CL4	8215	—	235	0.36	1.6	—	—	—	220	0.36	1.6	—	—	—	—	—	—	45	0.15	1.0



Geometría SM1 con diseño de filo muy vivo.

PPHE 1000-SM1	8215	—	260	0.31	0.5	155	0.28	0.5	245	0.31	0.5	—	—	—	—	—	—	50	0.15	1.0
PPHE 1200-SM1	8215	—	245	0.36	0.6	145	0.32	0.6	230	0.36	0.6	—	—	—	—	—	—	45	0.15	1.0
PPHE 1600-SM1	8215	—	250	0.31	0.8	150	0.28	0.8	235	0.31	0.8	—	—	—	—	—	—	50	0.15	1.0
PPHE 2000-SM1	8215	—	240	0.31	1.0	140	0.28	1.0	225	0.31	1.0	—	—	—	—	—	—	45	0.15	1.0



a_s DCX	5 %	10 %	15 %	20 %	25 %	30 %	40 %	50 %	60 %	70 %	75 %	80 %	90 %	100 %
	1.48	1.35	1.27	1.22	1.19	1.16	1.11	1.08	1.05	1.03	1.00	1.00	1.00	1.00
	2.20	1.60	1.35	1.20	1.10	0.95	0.85	0.75	0.85	0.95	1.00	1.00	1.00	1.00
	0.64	0.64	0.64	0.64	0.64	0.65	0.65	0.67	0.68	0.71	0.72	0.74	0.79	1.00

	PPH 08-CL1	PPH 10-CL1	PPH 12-CL1	PPH 16-CL1	PPH 20-CL1	PPH 25-CL1	PPH 30-CL1	PPH 32-CL1
	4.0	5.0	6.0	8.0	10.0	12.5	15.0	16.0
	—	—	—	—	—	—	—	—












	PPH 08-CL4	PPH 10-CL4	PPH 12-CL4	PPH 16-CL4	PPH 20-CL4	PPH 25-CL4	PPH 30-CL4	PPH 32-CL4
	4.0	5.0	6.0	8.0	10.0	12.5	15.0	16.0
	—	—	—	—	—	—	—	—




	PPHE 10-SM1	PPHE 12-SM1	PPHE 16-SM1	PPHE 20-SM1
	5.0	6.0	8.0	10.0
	—	—	—	—

	PPHF 08-CE1	PPHF 10-CE1	PPHF 12-CE1	PPHF 16-CE1	PPHF 20-CE1	PPHF 25-CE1
	0.6	0.8	1.0	1.3	1.6	1.9
	0.40	0.50	0.60	0.80	1.00	1.20

	PPHT 08-A2	PPHT 08-A2	PPHT 08-A2	PPHT 08-A2	PPHT 10-A2	PPHT 10-A2	PPHT 10-A2	PPHT 12-A2	PPHT 12-A2	PPHT 12-A2	PPHT 16-A2
	0.3	0.5	0.8	1.0	0.5	0.8	1.0	0.5	1.0	2.0	1.0
	—	—	—	—	—	—	—	—	—	—	—

	PPHT 16-A2	PPHT 16-A2	PPHT 16-A2	PPHT 20-A2	PPHT 20-A2	PPHT 20-A2	PPHT 20-A2	PPHT 25-A2
	1.3	2.0	3.0	1.0	1.6	3.0	4.0	2.0
	—	—	—	—	—	—	—	—

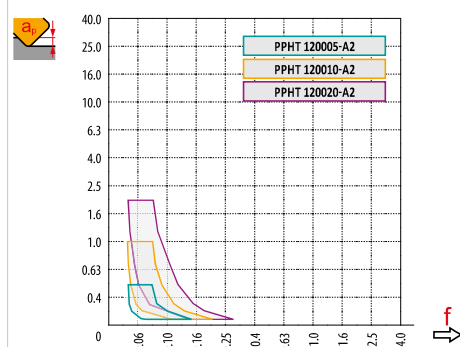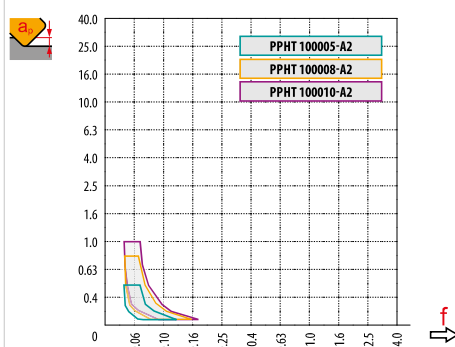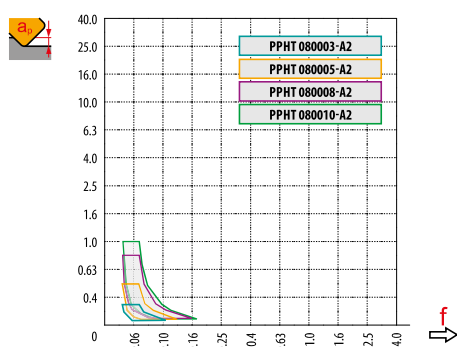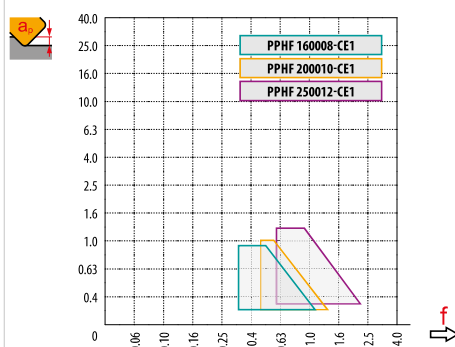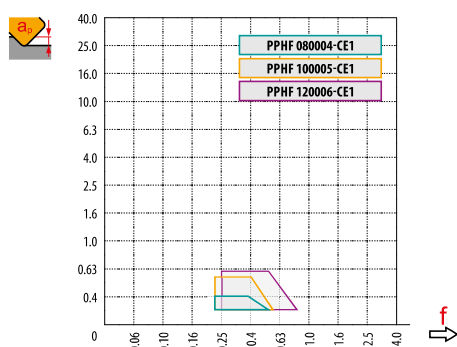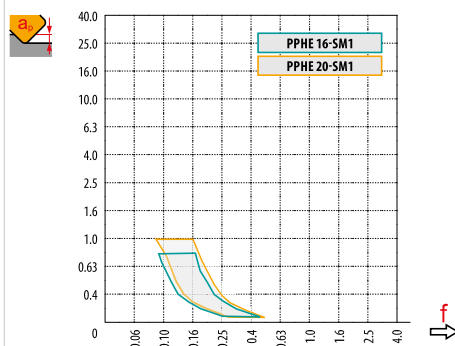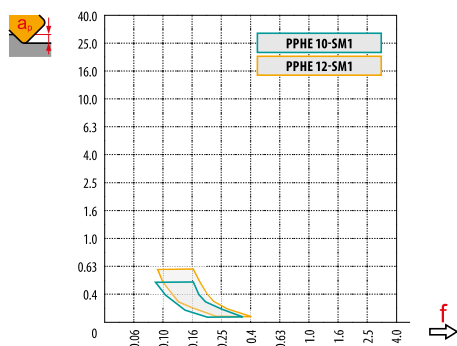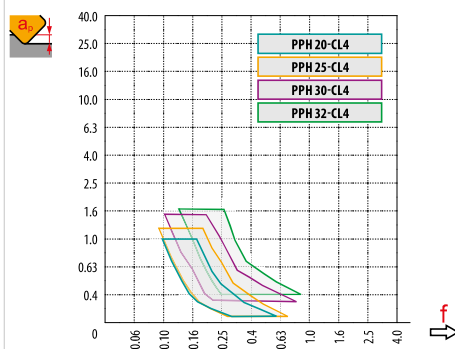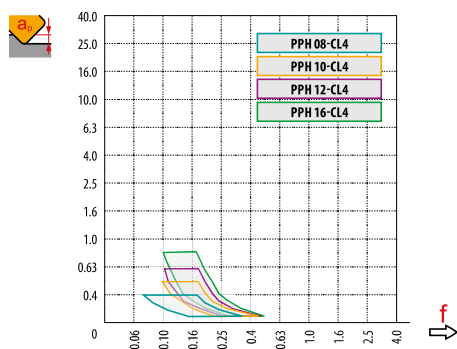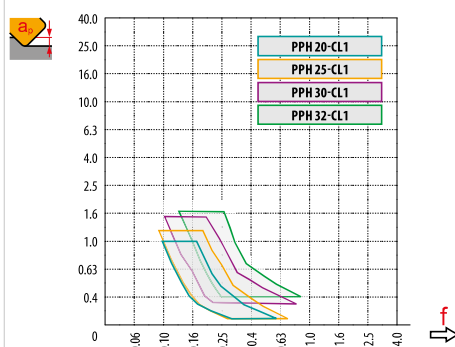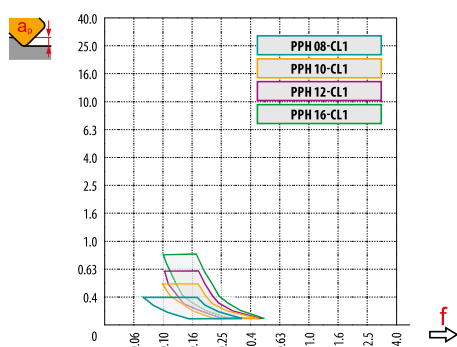

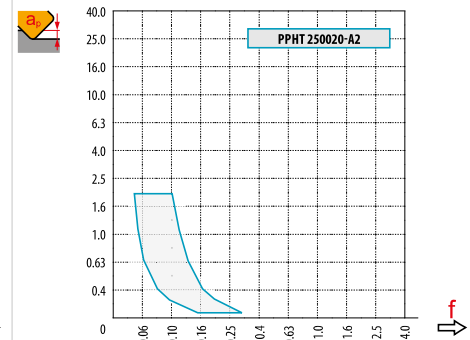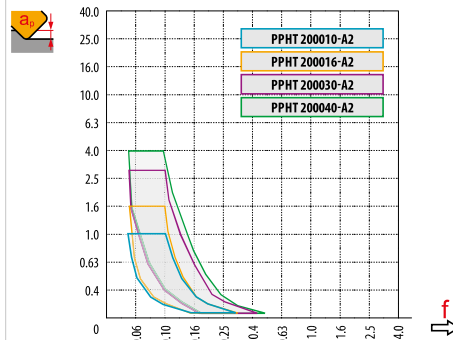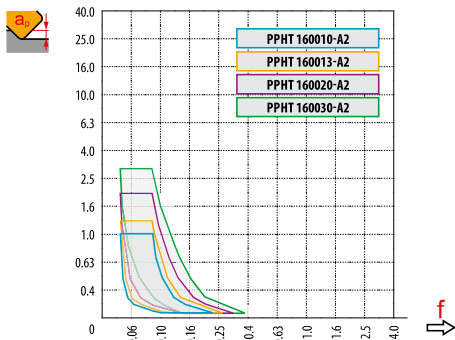

			0.3	0.4	0.5	0.7	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	6.0	8.0	10.0	12.0	15.0	16.0
PPH 08	8		3.0	3.5	3.9	4.5	5.3	5.8	6.2	6.9	7.4	7.7	8.0	—	—	—	—	—	—	—
PPH 10	10		3.4	3.9	4.4	5.1	6.0	6.6	7.1	8.0	8.7	9.2	9.8	10.0	—	—	—	—	—	—
PPH 12	12		3.7	4.3	4.8	5.6	6.6	7.3	7.9	8.9	9.7	10.4	11.3	11.8	12.0	—	—	—	—	—
PPH 16	16		4.3	5.0	5.6	6.5	7.7	8.6	9.3	10.6	11.6	12.5	13.9	14.8	15.5	16.0	—	—	—	—
PPH 20	20		4.9	5.6	6.2	7.4	8.7	9.7	10.5	12.0	13.2	14.3	16.0	17.3	18.3	19.6	20.0	—	—	—
PPH 25	25		5.4	6.3	7.0	8.2	9.8	10.9	11.9	13.6	15.0	16.2	18.3	20.0	21.4	23.3	24.5	25.0	—	—
PPH 30	30		5.97	6.88	7.68	9.06	10.77	11.99	13.08	14.97	16.58	18.00	20.40	22.36	24.00	26.53	28.28	29.39	30.00	—
PPH 32	32		6.17	7.11	7.94	9.36	11.14	12.40	13.53	15.49	17.18	18.65	21.17	23.24	24.98	27.71	29.66	30.98	31.94	32.00




			3	5	10	15	20	30	40	50	60	80	100
PPH 08	8		0.310	0.400	0.566	0.693	0.800	0.980	1.131	1.265	1.386	1.600	1.789
PPH 10	10		0.346	0.447	0.632	0.775	0.894	1.095	1.265	1.414	1.549	1.789	2.000
PPH 12	12		0.379	0.490	0.693	0.849	0.980	1.200	1.386	1.549	1.697	1.960	2.191
PPH 16	16		0.438	0.566	0.800	0.980	1.131	1.386	1.600	1.789	1.960	2.263	2.530
PPH 20	20		0.490	0.632	0.894	1.095	1.265	1.549	1.789	2.000	2.191	2.530	2.828
PPH 25	25		0.548	0.707	1.000	1.225	1.414	1.732	2.000	2.236	2.449	2.828	3.162
PPH 30	30		0.600	0.775	1.095	1.342	1.549	1.897	2.191	2.449	2.683	3.098	3.464
PPH 32	32		0.620	0.800	1.131	1.386	1.600	1.960	2.263	2.530	2.771	3.200	3.578

	a_e	1 %	2.5 %	5 %	7.5 %	10 %	15 %	20 %	25 %	30 %	35 %	40 %	45 %	50 %	60 %	70 %	75 %	80 %	90 %	100 %
																				
19.9 %	1.0 %	2.86	1.84	1.33	1.12	1.00	0.89	—	—	—	—	—	—	—	—	—	—	—	—	—
31.2 %	2.5 %	3.58	2.28	1.64	1.36	1.20	1.01	0.92	0.88	0.91	—	—	—	—	—	—	—	—	—	—
43.6 %	5.0 %	4.22	2.68	1.92	1.58	1.39	1.16	1.03	0.95	0.90	0.88	0.89	—	—	—	—	—	—	—	—
52.7 %	7.5 %	4.63	2.95	2.10	1.73	1.51	1.26	1.11	1.02	0.96	0.91	0.89	0.88	0.90	—	—	—	—	—	—
60.0 %	10.0 %	4.94	3.14	2.24	1.84	1.61	1.33	1.18	1.07	1.00	0.95	0.91	0.89	0.88	1.00	—	—	—	—	—
71.4 %	15.0 %	5.39	3.42	2.43	2.00	1.74	1.44	1.27	1.15	1.07	1.01	0.96	0.93	0.90	0.88	0.93	—	—	—	—
80.0 %	20.0 %	5.70	3.62	2.57	2.11	1.84	1.52	1.33	1.21	1.12	1.05	1.00	0.96	0.93	0.89	0.88	0.89	1.00	—	—
86.6 %	25.0 %	5.93	3.76	2.67	2.20	1.91	1.58	1.38	1.25	1.16	1.08	1.03	0.99	0.95	0.90	0.88	0.88	0.89	—	—
91.7 %	30.0 %	6.10	3.87	2.75	2.26	1.96	1.62	1.42	1.28	1.18	1.11	1.05	1.01	0.97	0.92	0.89	0.88	0.88	0.93	—
95.4 %	35.0 %	6.23	3.95	2.80	2.30	2.00	1.65	1.44	1.31	1.20	1.13	1.07	1.02	0.98	0.93	0.89	0.88	0.88	0.90	—
98.0 %	40.0 %	6.31	4.00	2.84	2.33	2.03	1.67	1.46	1.32	1.22	1.14	1.08	1.03	0.99	0.93	0.90	0.89	0.88	0.89	—
99.5 %	45.0 %	6.36	4.03	2.86	2.35	2.04	1.68	1.47	1.33	1.23	1.15	1.09	1.04	1.00	0.94	0.90	0.89	0.88	0.88	—
100.0 %	50.0 %	6.38	4.04	2.87	2.35	2.05	1.69	1.48	1.33	1.23	1.15	1.09	1.04	1.00	0.94	0.90	0.89	0.88	0.88	1.00

			0.0	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0	1.25	1.5	2.0	2.5	3.0	4.0
PPHT 08-A2	8	0.3	7.4	8.0	—	—	—	—	—	—	—	—	—	—	—	—	—
PPHT 08-A2		0.5	7.0	7.9	8.0	8.0	—	—	—	—	—	—	—	—	—	—	—
PPHT 08-A2		0.8	6.4	7.6	7.8	7.9	7.9	8.0	8.0	—	—	—	—	—	—	—	—
PPHT 08-A2		1.0	6.0	7.4	7.6	7.7	7.8	7.9	8.0	8.0	8.0	—	—	—	—	—	—
PPHT 10-A2	10	0.5	9.0	9.9	10.0	10.0	—	—	—	—	—	—	—	—	—	—	—
PPHT 10-A2		0.8	8.4	9.6	9.8	9.9	9.9	10.0	10.0	—	—	—	—	—	—	—	—
PPHT 10-A2		1.0	8.0	9.4	9.6	9.7	9.8	9.9	10.0	10.0	10.0	—	—	—	—	—	—
PPHT 12-A2	12	0.5	11.0	11.9	12.0	12.0	—	—	—	—	—	—	—	—	—	—	—
PPHT 12-A2		1.0	10.0	11.4	11.6	11.7	11.8	11.9	12.0	12.0	12.0	—	—	—	—	—	—
PPHT 12-A2		2.0	8.0	10.1	10.4	10.6	10.9	11.0	11.2	11.3	11.5	11.7	11.9	12.0	—	—	—
PPHT 16-A2	16	1.0	14.0	15.4	15.6	15.7	15.8	15.9	16.0	16.0	16.0	—	—	—	—	—	—
PPHT 16-A2		1.3	13.4	15.1	15.3	15.4	15.6	15.7	15.8	15.9	15.9	16.0	—	—	—	—	—
PPHT 16-A2		2.0	12.0	14.1	14.4	14.6	14.9	15.0	15.2	15.3	15.5	15.7	15.9	16.0	—	—	—
PPHT 16-A2		3.0	10.0	12.6	13.0	13.3	13.6	13.9	14.1	14.3	14.5	14.9	15.2	15.7	15.9	16.0	—
PPHT 20-A2	20	1.0	18.0	19.4	19.6	19.7	19.8	19.9	20.0	20.0	20.0	—	—	—	—	—	—
PPHT 20-A2		1.6	16.8	18.7	18.9	19.1	19.3	19.4	19.6	19.7	19.8	19.9	20.0	—	—	—	—
PPHT 20-A2		3.0	14.0	16.6	17.0	17.3	17.6	17.9	18.1	18.3	18.5	18.9	19.2	19.7	19.9	20.0	—
PPHT 20-A2		4.0	12.0	15.0	15.5	15.9	16.2	16.5	16.8	17.1	17.3	17.8	18.2	18.9	19.4	19.7	20.0
PPHT 25-A2	25	2.0	21.0	23.1	23.4	23.6	23.9	24.0	24.2	24.3	24.5	24.7	24.9	25.0	—	—	—
PPHF 08-CE1	8	0.6	2.8	6.0	7.1	—	—	—	—	—	—	—	—	—	—	—	—
PPHF 10-CE1	10	0.8	3.6	6.8	7.9	9.0	—	—	—	—	—	—	—	—	—	—	—
PPHF 12-CE1	12	1.0	4.2	7.4	8.5	9.6	10.7	11.8	—	—	—	—	—	—	—	—	—
PPHF 16-CE1	16	1.3	5.6	8.8	9.9	11.0	12.1	13.2	14.2	15.3	—	—	—	—	—	—	—
PPHF 20-CE1	20	1.6	7.2	10.4	11.5	12.6	13.7	14.8	15.8	16.9	18.0	—	—	—	—	—	—
PPHF 25-CE1	25	1.9	9.2	12.4	13.5	14.6	15.7	16.8	17.8	18.9	20.0	22.7	—	—	—	—	—



		3	5	10	15	20	30	40	50	60	80	100
8		0.310	0.400	0.566	0.693	0.800	0.980	1.131	1.265	1.386	1.600	1.789
10		0.346	0.447	0.632	0.775	0.894	1.095	1.265	1.414	1.549	1.789	2.000
12		0.379	0.490	0.693	0.849	0.980	1.200	1.386	1.549	1.697	1.960	2.191
16		0.438	0.566	0.800	0.980	1.131	1.386	1.600	1.789	1.960	2.263	2.530
20		0.490	0.632	0.894	1.095	1.265	1.549	1.789	2.000	2.191	2.530	2.828
25		0.548	0.707	1.000	1.225	1.414	1.732	2.000	2.236	2.449	2.828	3.162
		3	5	10	15	20	30	40	50	60	80	100
1.3		0.177	0.228	0.322	0.395	0.456	0.559	0.645	0.721	0.790	0.912	1.020
1.6		0.196	0.253	0.358	0.438	0.506	0.620	0.716	0.800	0.876	1.012	1.131
1.9		0.214	0.276	0.390	0.477	0.551	0.675	0.780	0.872	0.955	1.103	1.233
2.0		0.219	0.283	0.400	0.490	0.566	0.693	0.800	0.894	0.980	1.131	1.265
3.0		0.268	0.346	0.490	0.600	0.693	0.849	0.980	1.095	1.200	1.386	1.549
4.0		0.310	0.400	0.566	0.693	0.800	0.980	1.131	1.265	1.386	1.600	1.789

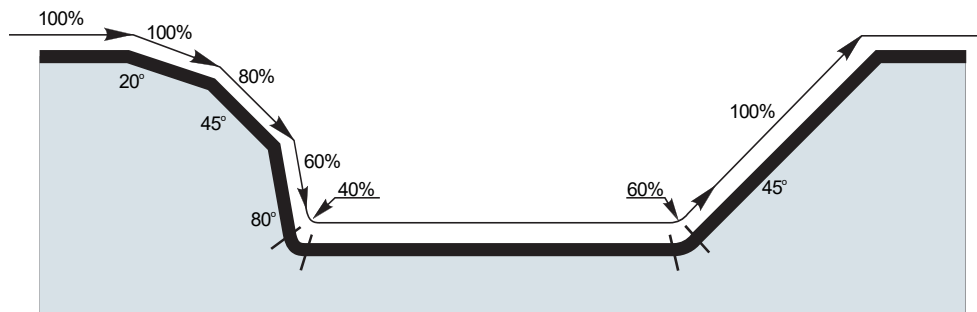

			
PPHT 08-A2	8	0.3	2.4
PPHT 08-A2		0.5	2.4
PPHT 08-A2		0.8	2.5
PPHT 08-A2		1.0	2.7
PPHT 10-A2	10	0.5	3.2
PPHT 10-A2		0.8	3.3
PPHT 10-A2		1.0	3.4
PPHT 12-A2	12	0.5	4.0
PPHT 12-A2		1.0	4.2
PPHT 12-A2		2.0	4.6
PPHT 16-A2	16	1.0	5.7
PPHT 16-A2		1.3	5.8
PPHT 16-A2		2.0	6.0
PPHT 16-A2		3.0	6.4
PPHT 20-A2	20	1.0	7.2
PPHT 20-A2		1.6	7.4
PPHT 20-A2		3.0	7.8
PPHT 20-A2		4.0	8.2
PPHT 25-A2	25	2.0	9.3

			
PPHF 08-CE1	8	0.6	2.0
PPHF 10-CE1	10	0.8	2.5
PPHF 12-CE1	12	1.0	3.0
PPHF 16-CE1	16	1.3	4.0
PPHF 20-CE1	20	1.6	5.0
PPHF 25-CE1	25	1.9	6.0



PPHT 08-A2	8	0.3	6.3	1.2/11
PPHT 08-A2		0.5	6.1	1.2/12
PPHT 08-A2		0.8	5.7	1.2/12
PPHT 08-A2		1.0	6.8	1.2/11
PPHT 10-A2	10	0.5	6.9	1.5/13
PPHT 10-A2		0.8	6.6	1.5/13
PPHT 10-A2		1.0	7.5	1.5/12
PPHT 12-A2	12	0.5	7.9	1.8/13
PPHT 12-A2		1.0	7.5	1.8/14
PPHT 12-A2		2.0	9.0	1.8/12
PPHT 16-A2	16	1.0	8.9	2.4/16
PPHT 16-A2		1.3	8.9	2.4/16
PPHT 16-A2		2.0	8.5	2.4/17
PPHT 16-A2		3.0	12.3	2.4/11
PPHT 20-A2	20	1.0	9.3	3/19
PPHT 20-A2		1.6	9.1	3/19
PPHT 20-A2		3.0	8.8	3/20
PPHT 20-A2		4.0	11.4	3/15
PPHT 25-A2	25	2.0	8.3	3.7/26

PPHF 08-CE1	8	0.6	8.0	0.4/3
PPHF 10-CE1	10	0.8	8.0	0.5/4
PPHF 12-CE1	12	1.0	8.0	0.6/5
PPHF 16-CE1	16	1.3	8.0	0.8/6
PPHF 20-CE1	20	1.6	8.0	1.0/8
PPHF 25-CE1	25	1.9	8.0	1.2/9



			DMIN	DMAX		
PPHT 08-A2	8	0.3	11.0	15.9	0.5	0.5
PPHT 08-A2		0.5	10.9	15.9	0.5	0.5
PPHT 08-A2		0.8	10.7	15.9	0.4	0.4
PPHT 08-A2		1.0	10.3	15.9	0.4	0.4
PPHT 10-A2	10	0.5	13.4	19.9	0.7	0.7
PPHT 10-A2		0.8	13.2	19.9	0.6	0.6
PPHT 10-A2		1.0	12.9	19.9	0.6	0.6
PPHT 12-A2	12	0.5	15.8	23.9	1.0	1.0
PPHT 12-A2		1.0	15.4	23.9	0.8	0.8
PPHT 12-A2		2.0	14.6	23.9	0.7	0.7
PPHT 16-A2	16	1.0	20.4	31.9	1.3	1.3
PPHT 16-A2		1.3	20.2	31.9	1.3	1.3
PPHT 16-A2		2.0	19.7	31.9	1.0	1.0
PPHT 16-A2		3.0	18.9	31.9	1.2	1.2
PPHT 20-A2	20	1.0	25.4	39.9	1.8	1.8
PPHT 20-A2		1.6	24.9	39.9	1.6	1.6
PPHT 20-A2		3.0	24.1	39.9	1.2	1.2
PPHT 20-A2		4.0	23.3	39.9	1.3	1.3
PPHT 25-A2	25	2.0	31.1	49.9	1.8	1.8


			DMIN	DMAX		
PPHF 08-CE1	8	0.6	10.0	14.7	0.40	0.40
PPHF 10-CE1	10	0.8	13.0	18.4	0.50	0.50
PPHF 12-CE1	12	1.0	15.7	22.0	0.60	0.60
PPHF 16-CE1	16	1.3	20.9	29.4	0.80	0.80
PPHF 20-CE1	20	1.6	26.2	36.7	1.00	1.00
PPHF 25-CE1	25	1.9	33.0	46.1	1.20	1.20



			
PPHT 08-A2	8	0.3	0.52
PPHT 08-A2		0.5	0.47
PPHT 08-A2		0.8	0.39
PPHT 08-A2		1.0	0.40
PPHT 10-A2	10	0.5	0.69
PPHT 10-A2		0.8	0.61
PPHT 10-A2		1.0	0.62
PPHT 12-A2	12	0.5	0.97
PPHT 12-A2		1.0	0.79
PPHT 12-A2		2.0	0.68
PPHT 16-A2	16	1.0	1.33
PPHT 16-A2		1.3	1.26
PPHT 16-A2		2.0	1.03
PPHT 16-A2		3.0	1.15
PPHT 20-A2	20	1.0	1.80
PPHT 20-A2		1.6	1.59
PPHT 20-A2		3.0	1.21
PPHT 20-A2		4.0	1.27
PPHT 25-A2	25	2.0	1.83

			
PPHF 08-CE1	8	0.6	0.40
PPHF 10-CE1	10	0.8	0.50
PPHF 12-CE1	12	1.0	0.60
PPHF 16-CE1	16	1.3	0.80
PPHF 20-CE1	20	1.6	1.00
PPHF 25-CE1	25	1.9	1.20

i

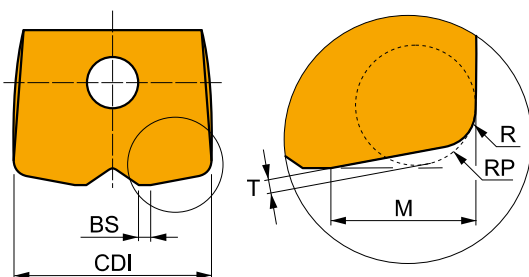

		R	RP	M	T
08		0.6	1.0	2.6	0.3
10		0.8	1.2	3.2	0.4
12		1.0	1.5	3.9	0.4
16		1.3	2.0	5.2	0.6
20		1.6	2.5	6.4	0.7
25		1.9	3.0	7.9	0.9

i

Voladizo (múltiplo del diámetro DCX)	< 3.0	3.0 – 3.5	3.6 – 4.0	4.1 – 4.5	> 4.6
Factor de multiplicación para la velocidad de corte	1.0	0.9	0.8	0.7	0.5